

IEC Appliance Inlet C14, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal



Snap-In Version

**Description**

- Panel Mount:
Snap-in version, from front side
- 1 Function
- Appliance Inlet, Pin temperature 70 °C Protection class I
- Solder terminals

Approvals

- CE UL CCC

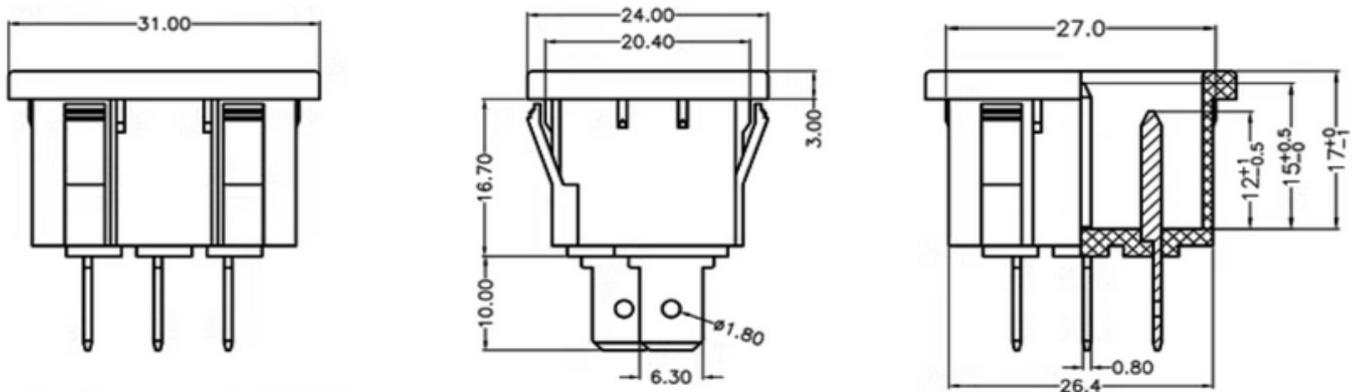
Characteristics

- Designed for standard applications
- Suitable for use in equipment according to IEC/UL 60950

Technical Data

Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to +70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder
Panel Thickness	Snap-in from 0.8mm to 3mm universal
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance Inlet	C14 acc. to IEC 60320 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class I
-----------------	--

Dimensions

Terminals: 6.3x0.8